

Duplicate Controller Functions

User's Manual
— Version: 1.0 —

Attention:

Wait over 5 seconds to power on after shutdown to prevent the abnormal operation of the system.



Copyright©2008 ACARD Technology Corp.
Release: January 2008



Copyright and Trademarks

The information of the products in this manual is subject to change without prior notice and does not represent a commitment on the part of the vendor, who assumes no liability or responsibility for any errors that appear in this manual.

ACARD and SCSIDE are the trademarks of ACARD Technology Corp.

This manual contains materials protected under International Copyright Laws. All rights reserved. No part of this manual may be reproduced, transmitted or transcribed without the expressed written permission of the manufacturer and author of this manual.

ACARD's Duplicate Controller is used for copying and editing personal audio and video data. Violating Copy Right is a criminal act. ACARD's Copy Controller only supports legal backup operation.

ACARD Technology Corp. is not responsible for illegal recording.

Table of Contents

Chapter 1 The Panel	6
Chapter 2 Functions	7
2.1 Copy	9
2.2 Test	9
2.3 Test & Copy	10
2.4 Verify	10
2.5 Compare	11
2.6 Prescan	11
2.7 Disc Info	12
2.8 Select Source	12
2.9 Image	13
2.9.1 Load	13
2.9.2 Delete Image	13
2.9.3 Image Info	14
2.9.4 Compare Image	14
2.9.5 Select Image	15
2.9.6 Image Src Drive	15
2.9.7 Image Format Info	16
2.9.8 Edit	16
2.10 Edit Track (for CD only)	17
2.10.1 CD to CD Edit	17
2.10.2 CD to HDD Edit	19
2.10.3 Play Audio Track	22
2.10.4 Close Session	23
2.11 Setup	23
2.11.1 Language	24
2.11.2 CD Burn Speed	24
2.11.3 DVD Burn Speed	24
2.11.4 Read Speed	25
2.11.5 Auto Start Drive	25
2.11.6 Startup Menu	25
2.11.7 Auto Verify	25

2.11.8 Auto Compare	26
2.11.9 Auto Prescan	26
2.11.10 Eject Disc	26
2.11.11 Burn On The Fly	27
2.11.12 Burn Mode	27
2.11.13 Display Time	27
2.11.14 Button Sound	28
2.11.15 Device Info	28
2.11.16 System Info	28
2.11.17 Quick Erase	29
2.11.18 Full Erase	29
2.11.19 Auto Close Tray	30
2.11.20 Quick Compare	30
2.11.21 Audio Buen Speed	31
Chapter 3 Troubleshooting	32
3.1 About LCD	32
3.2 About Error Messages	32
3.3 About DVD-ROM/DVD Writers	32
3.4 About Buttons	32
3.5 About DVD Writer Not Readable	32
3.6 About High Failure Rate	32
3.7 About Firmware Update	33
Appendix A LCD Messages	34



WEEE Statement

English

In order to cope with the increasing waste electrical and electronic equipment, reduce the use of landfill and incinerator, and prevent the harmful matter of waste equipment from entering the environment, the European Union (EU) has set the Directive on Waste Electrical and Electronic Equipment (WEEE) asking manufacturers to collect, recycle and treat waste electrical and electronic equipment properly. Member nations already established their free of charge recycle systems of WEEE before August 13, 2005. Accordingly, ACARD has to be responsible for recycling all products exported to Germany. You can return your ACARD product that needs recycling to a local collector.

WEEE Erklärung

German

Mit dem Ziel die steigende Menge elektrischer und elektronischer Altgeräte zu bewältigen ohne hierzu unnötig Mülldeponien und Verbrennungsanlagen zu belasten und um die Verschmutzung der Umwelt durch freiwerdende Stoffe aus den Altgeräten zu vermeiden, hat die Europäische Union (EU) die Richtlinie über Elektro- und Elektronik-Altgeräte erlassen. Die Richtlinie verpflichtet Hersteller, elektrische und elektronische Altgeräte umweltgerecht einzusammeln, zu recyceln und zu entsorgen. Die Mitgliedsstaaten der EU haben bereits ihre kostenfreien Recyclesysteme konform der WEEE vor dem 13. August 2005 eingerichtet. Entsprechend der Richtlinie ist ACARD verantwortlich für die umweltgerechte Entsorgung aller nach Deutschland exportierten ACARD Produkte. Sie können Ihr zu entsorgendes ACARD Produkt zu Ihrer örtlichen Sammelstelle bringen.

AEEA verklaring

Dutch

Met het doel de stijgende hoeveelheid afgedankte elektrische en elektronische apparatuur te beheersen zonder hiervoor onnodig stortplaatsen en verbrandingsovens te belasten en om de vervuiling van het milieu door vrijkomende stoffen uit de afgedankte apparatuur te voorkomen, heeft de Europese Unie (EU) de richtlijn betreffende afgedankte elektrische en elektronische apparatuur besloten. Deze richtlijn verplicht fabrikanten afgedankte elektrische en elektronische apparatuur in te zamelen, te recycelen en te verwijderen. De lidstaten van de EU hebben reeds de kosteloze recyclesystemen volgens de AEEA vóór de 13 augustus 2005 ingericht. Conform de richtlijn is ACARD verantwoordelijk voor de verwijdering van alle naar Nederland geëxporteerde ACARD producten. U kunt uw afgedankt ACARD product naar uw locale inzamelplaats brengen.

Elektrik ve Elektronik Madde Atıkları Demeci

Turkish

Elektrik ve elektronik madde atıklarının yukselmesiyle basedebilmek ,arazi doldurma ve cop yakma fırını kullanımını azaltmak,atık madde zararlarının cevreye yayılmasını onlemek icin Avrupa Birliği (AB),ureticilerden elektrik ve elektronik madde atıklarını gerektiği gibi toplamalarını,geri donusturmelerini ve kimyasal isleme tabi tutmalarını talep etmek icin Elektrik ve Elektronik Madde Atıkları uzerine bir direktif hazırladı.Topluluk uyeleri,13 Agustos 2005' ten once elektrik ve elektronik madde atıklarının ucretsiz geri donusum sistemlerini coktan olusturmuslardı.Bundan dolayı, ACARD, Almanya'ya ihrac ettigi butun urunlerin geri donusumunden sorumludur.ACARD urunleri geri donusum gerektirirse yerel toplayıcılara geri verebilirsiniz.

WEEE бюлетень

Russian

Чтобы справиться с увеличивающимся ненужным электрическим и электронным оборудованием, уменьшите использование закапывания мусора и использования установки для сжигания отходов, препятствуйте вредному выбросам загрязнять окружающую среду, Европейский союз (ЕС) установил Директиву по Ненужному Электрическому и Электронному Оборудованию (WEEE) для того, чтобы изготовителей собрали, перерабатывали и вообще проявили внимание к ненужному электрическому и электронному оборудованию должным образом. Члены нации установили бесплатную систему и электронному оборудованию должным образом. Члены нации установили бесплатную систему переработки WEEE до 13 августа 2005. Соответственно, ACARD обязан быть ответственным за то, что переработал все продукты, экспортируемые в Германию. Вы можете вернуть ваш продукт ACARD, который нуждается в рециркуляции местному сборщику.

WEEE Statement

French

Afin de gérer la quantité croissante de déchets électriques et électroniques, de réduire l'utilisation des décharges et des incinérateurs et d'éviter que des déchets nocifs ne polluent l'environnement, l'Union Européenne a publié la directive WEEE sur les déchets électriques et électroniques. Celle-ci spécifie que les fabricants doivent collecter, recycler et traiter l'équipement électronique et électrique usagé. Depuis le 13 août 2005, les pays membres ont mis en place un système de recyclage gratuit selon le WEEE,.

De ce fait, Acard est responsable du recyclage de tous les produits exportés vers l'Allemagne. Vous pouvez mettre au rebut votre équipement ACARD usagé dans votre centre local de recyclage.

Pour plus d'informations sur les lieux de mise au rebut des équipements usagés destinés au recyclage, veuillez contacter votre mairie, votre service de traitement des déchets ménagers ou le magasin où vous avez acheté le produit.

RAEE

Spanish

Con la finalidad de reducir el incremento de residuos eléctricos y de material electrónico, reduciendo el uso de los vertederos e incineradoras y prevenir el preocupante aumento del contacto de estos residuos con el medio ambiente. Por este motivo la Unión Europea ha fijado la Directiva de Residuos de Aparatos Eléctricos y Electrónicos (RAEE) solicitando a los fabricantes la recolección, reciclaje y tratamiento de estos residuos correctamente. Los países miembros ya han establecido su sistema de reciclaje gratuito de RAEE antes del 13 de Agosto del 2005. Por este motivo ACARD es el responsable del reciclaje de todos los productos exportados a Alemania. Usted puede devolver su producto Acard a un punto de recogida local cuando desee reciclarlo.

Dichiarazione WEEE


Italian

Per far fronte all'aumento dei residui delle apparecchiature elettriche ed elettroniche, ridurre l'uso di materiale di riporto e degli inceneritori, ed impedire che il materiale nocivo delle apparecchiature residue entri a contatto con l'ambiente, l'Unione Europea (UE) ha stabilito le Direttive sui Residui delle apparecchiature Elettriche ed Elettroniche (WEEE) chiedendo ai fornitori di raccogliere correttamente, riciclare e trattare le apparecchiature elettriche ed elettroniche residue. Le nazioni facenti parte dell'Unione Europea hanno già stabilito il loro sistema gratuito di riciclaggio di questo materiale (WEEE) prima del 13 agosto 2005. Di conseguenza, ACARD è responsabile del riciclaggio di tutti i prodotti esportati in Germania. Potete restituire il vostro prodotto acquistato da ACARD che deve essere riciclato da un'azienda specifica locale.

Chapter 1 The Panel


There are four buttons and an LCD on the panel of IDE Copy all version and SATA Copy Standard Version.

1. It shows a function or a message.
2. It's used to scroll up function menus.
3. It's used to scroll down function menus.
4. It's used to execute a function.
5. It's used to cancel a function.

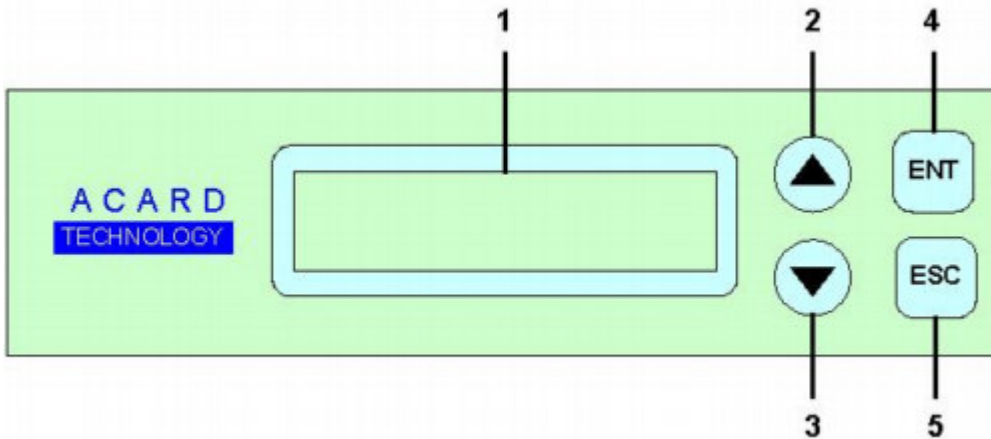


There are six buttons and an LCD on the panel of SATA Copy Professional Version.

1. It shows a function or a message.
2. It's used to scroll up function menus.
3. It's used to scroll down function menus.
4. It's used to execute a function.
5. It's used to cancel a function.
6. It's used to entry "Speed Menu".
7. It's used to entry "Source Menu".

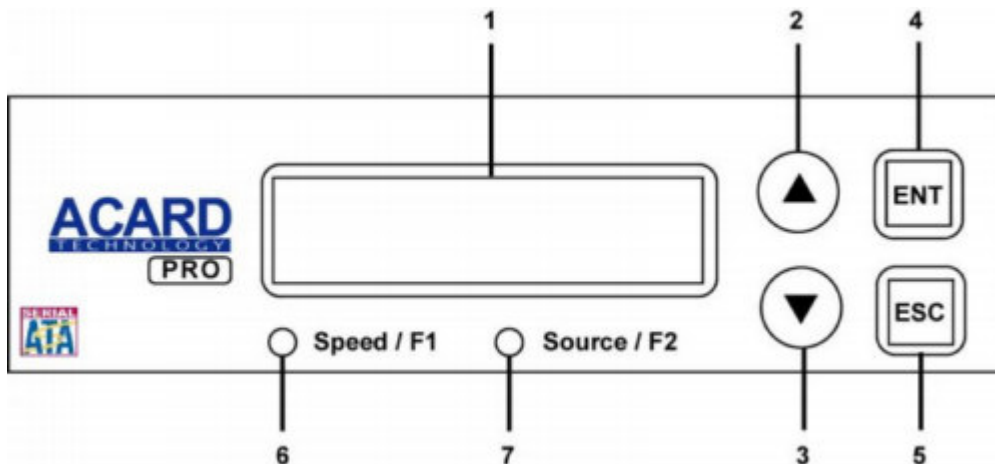


Chapter 2 Functions


There are 11 major functions in the copy controller, and there are subfunctions in Function 9, 10, and 11 as the following figures show.

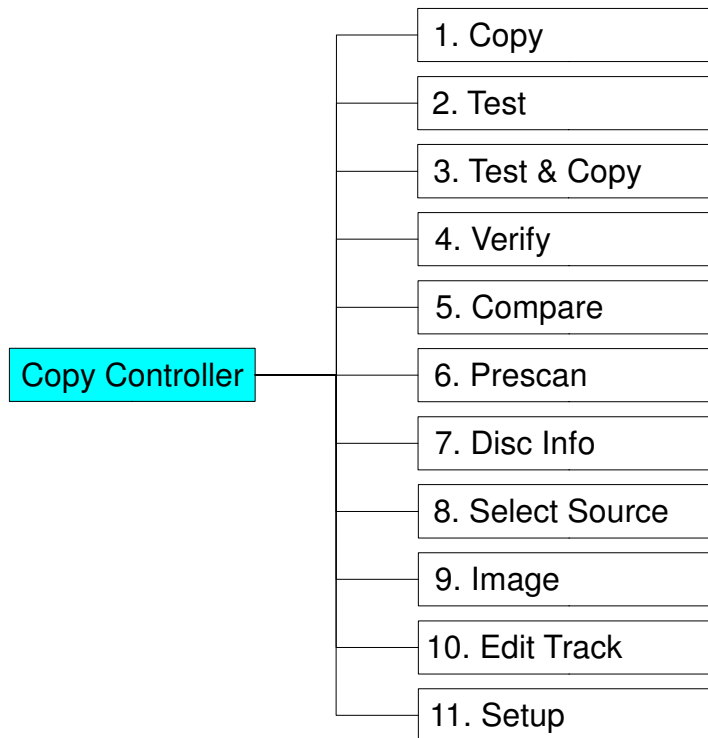


In Function 9 there are 8 subfunctions.

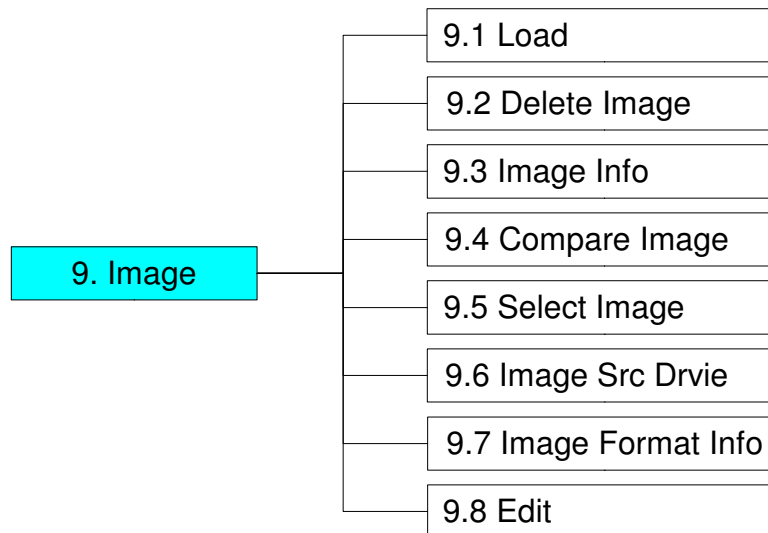

In Function 10 there are 4 subfunctions.

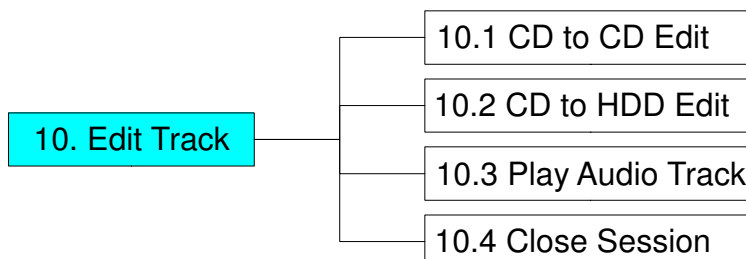

In Function 11 there are 21 subfunctions.

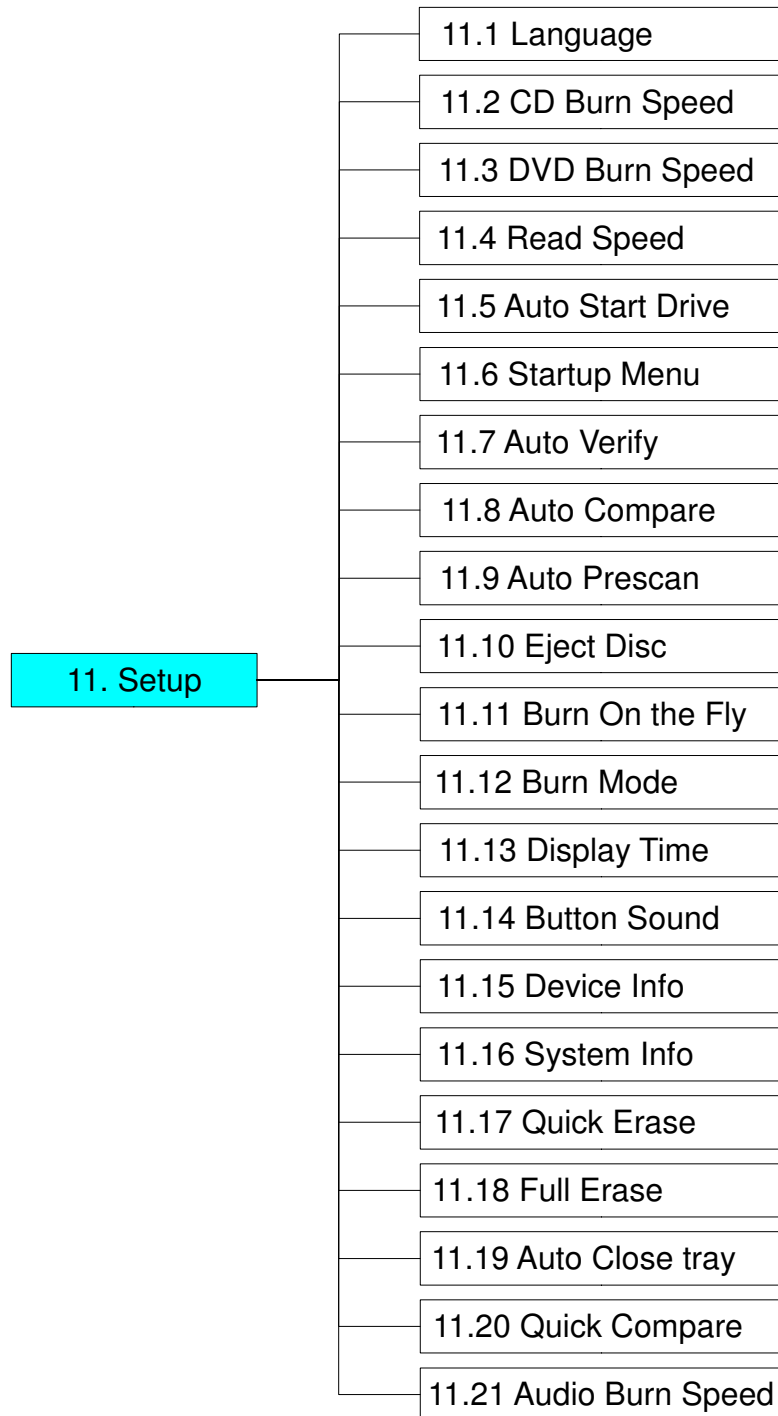

Among the 11 functions, Function 10 Edit Track is designed exclusively for editing a collection of favorite songs from CDs. During operation if you don't understand an LCD message, see Appendix A .

2.1 Copy

Function 1 Copy is copy functions allows instant copy of source (original disc/image) to the target drives (burners). Before copying be sure that the source DVD is placed into DVD-ROM, or there are data in a certain HDD partition if you have installed a hard drive. If you are not so sure of real copying, use Function 2 Test to simulate first.

Select function 1. Put a source DVD into DVD-ROM and blank DVDs into the DVD writers. A rewriteable DVD containing old data is also usable, but the old data will be automatically erased.

1. Copy

After the DVD-ROM and DVD writers detect DVDs, press ENT to start copying. LCD will show the copying information as follows.

Copying-DVD	0%
4213.4MB	7:30

When copying is in progress, MB and time will decrease while the percentage of completion will increase. "MB" means the size of data that you want to copy.

When copying comes to an end, LCD will show the results as follows. The passed DVDs will eject automatically.

1. Copy
OK: 07

2.2 Test

Function 2 Test is simulation of duplication function, no data will be written to the media (CDR/DVDR).

Select function 2. Put a source DVD into DVD-ROM and blank DVDs into the DVD writers. Only a DVD-R disc supports this function.

2. Test

Press **ENT** to start simulation. If you use DVD rewriteable discs that contain data, the old data will be quickly erased before simulation as shown below.

Erasing disc

LCD will show the testing information as follows.

Testing-DVD	0%
4213.4MB	7:30

When the test comes to an end, LCD will show the results as follows.

2. Test
OK: 07

Stopping the test halfway does not affect the DVDs, but if the DVD-rewriteable discs contain important data, they may be destroyed.

2.3 Test & Copy

Function 3 Test & Copy is to test first and then copy actually.

Select function 3. Put a source DVD into DVD-ROM and blank DVDs into the DVD writers.

3. Test & Copy

Press **ENT** to start simulation. LCD will show the testing information as follows.

Testing-DVD	0%
4213.4MB	7:30

When the test finishes, actual copying will begin as shown below.

Copying-DVD	0%
4213.4MB	7:30

When the whole process finishes, LCD will show the results as follows.

3. Test & Copy
OK: 07

Note that those discs that have passed the test will be copied right away while those that haven't won't be.

2.4 Verify (ARS-2039A do not have this function)

Function 4 Verify is to verify the data burned on CD/DVDs.

Select function 4.

4. Verify

Press **ENT** to verify. LCD will show the verification information as follows.

Verify-DVD	0%
4213.4MB	7:30

When verification comes to an end, LCD will show the results as follows.

4. Verify
OK: 07

2.5 Compare (ARS-2039A do not have this function)

Function 5 Compare is to make a comparison between the source DVD and the target DVDs after copying.

Select function 5. Put the source DVD into DVD-ROM and the target DVDs into DVD writers.

5. Compare

Press **ENT** to compare. LCD will show the comparison information as follows.

Compare-DVD	0%
4213.4MB	7:30

When comparison comes to an end, LCD will show the results as follows.

Compare	OK: 7
Fail: 0	Diff: 0

Press **ENT** to see the details of source 1 as shown below.

Src: 02 DVD-RW
Identical

If comparison fails, LCD will show the failure. By pressing ENT twice, LCD will show that the contents of source 1 and those of source 2 do not match as follows.

Src: 02 DVD-RW
TOC not match

2.6 Prescan

Function 6 Prescan is to scan if the source DVD can be read correctly, and by the way to test the reading speed.

Select function 6. Put the source DVD into DVD-ROM.

6. Prescan

Press **ENT** to prescan. LCD will show the scanning information as follows.

Scanning-DVD 0%
4213.4MB 7:30

When scanning finishes, and the source DVD can be read correctly, LCD will show the results as follows.

PreScan OK!

2.7 Disc Info

Function 7 Disc Info is to generate a simple report of the source.

Select function 7. Put the source DVD into DVD-ROM.

7. Disc Info

Press **ENT**, and LCD will show the DVD information as follows.

Disc Type:DVD-ROM
4213.4MB 7:30

2.8 Select Source

Function 8 Select Source is to identify and assign source drives.

Select function 8.

8. Select Source

Press **ENT**, and then press **▲ ▼** to select the source as shown below.

Src: DVD-ROM
01 IDE1 Master

After selecting the source such as DVD-ROM, you can press **ENT**, and LCD will show the message as follows.

DVD-ROM selected

Suppose you select HDD as the source and try to copy from one of its partitions, but the partition contains no data, an error message will appear on LCD. At this moment, you can switch to another partition that contains data, or use function 9 Image to load the data into the chosen partition first.

2.9 Image

Function 9 Image is valid only when you have installed a hard disk. This function includes 7 subfunctions: Load, Delete Image, Image Info, Compare Image, Select Image, Select Src Drive, and Image Format Info. The loaded data is called an image file. Refer to page 24 for the menu.


Select function 9.



9. Image

2.9.1 Load

Now press ENT, and you will enter the following figure. Here the function Load is to let you load data from DVD-ROM or any one of the DVD writers into the current partition of the hard disk. "P:A" means partition A.



9-01. Image P:A
Load

Press **ENT** to load. LCD will show the loading information as follows.



Load-A-DVD 0%
4213.4MB 7:30

After the image file is successfully loaded, LCD will show the results as follows.




Image load OK

If there is an image file existing in the current partition, the system will ask you whether to overwrite it or not. Please use ▲ ▼ to confirm Yes or No.





Image Exists
Overwrite ? Yes

2.9.2 Delete Image

If you want to delete an image file stored in a particular partition, you can use the function Delete Image to do so. First, select the function by pressing ▼.



9-02. Image P:A
Delete Image

The system will ask if you are sure to delete. Use ▲ ▼ to confirm Yes or No.

```
Delete Image ? Yes
A: Untitled!!
```

After the image file is deleted, LCD will show the results as follows.

```
Partition A:
Image is deleted
```

2.9.3 Image Info

This function is to show the basic information of an image file stored in a particular partition. First, select the function by pressing ▼.

```
9-03. Image P:A
Image Info
```

Press **ENT**, and LCD will show the information of the image file as follows.

```
Img Type:DVD+R
Capacity: 4213.4MB
```

2.9.4 Compare Image

This function is to compare the contents of the source DVD and those of the image file in the partition. First, select the function by pressing ▼.

```
9-04. Image P:A
Compare Image
```

Press **ENT**, and LCD will show the information of the image file as follows.

```
Com-A-DVD 0%
4213.4MB 7:30
```

When comparison comes to an end, LCD will show the results as follows.

```
Compare OK: 1
Fail: 0 Diff: 0
```

Press **ENT** to see the details of source as shown below.

```
Src: 01 SUPER MUL
Total: 4213.4MB
```

Press **ENT** to see the details of target. If the comparison is identical, LCD will show the message as follows.

```
Tgt: 00 HDD P:A
Identical
```

If comparison fails, LCD will show the failure. By pressing ENT twice, LCD will show that the contents of source and those of target do not match as follows.

```
Tgt: 00 HDD P:A
TOC not match
```

2.9.5 Select Image

This function is to select a partition in the hard disk. First, select the function by pressing ▼.

```
9-05. Image P:A
Select Image
```

After installing a hard disk, your copy controller will format it automatically. Each partition occupies 5GB. The number of partitions is dependent on the hard disk's capacity. The partitions are alphabetically arranged. Select a partition by pressing ▲ ▼, and LCD will show the message as follows.

```
Select Partition
A: DVD 4213.4MB
```

After the partition is selected, LCD will show the results as follows.

```
Set Partition to
A
```

2.9.6 Image Src Drive

This function is to select DVD-ROM or any of the DVD writers as the source from which you can load data into a particular partition as an image file.

First, select the function by pressing ▼.

```
9-06. Image P:A
Image Src Drive
```

Then, use ▲ ▼ to select DVD-ROM or any of the DVD writers as the source.

```
Select Img Src:
01 CH01 S-MUTLI
```

After selecting the source such as DVD-ROM, you can press ENT, and LCD will show the message as follows.

Load image from
Drive ID-01

2.9.7 Image Format Info

This function is to see how you have formatted your hard disk. It is related to function 12.4 Format HDD. There are 3 formats for choice: CD, DVD, and DL (Double Layer).

Now press ESC and ▼ to enter the following figure.

9-07. Image P:A
Image Format Info

Press **ENT** to see the following figure. This figure shows that the hard disk has been formatted as DVD.

Image Format Info
Auto

2.9.8 Edit

This function is to name a certain partition, but only when the partition contains an image file can title editing be valid. First, select the function by pressing ▼.

First, select the function by pressing ▼.

9-08. Image P:A
Edit

Press **ENT**. A title should be composed of 1 to 13 characters. The character can be A, B, C, etc. or 1, 2, 3, etc. or the combination of both. Use ▲ ▼ to select the number or alphabet. After selecting a desired one, press **ENT**.

Edit Title
?

After keying in the title, press **ENT** to see the following figure.

Edit Sub1 Title
?

Sub1 Title lets you key in a subtitle 1. You can press **ENT** again to key in a subtitle 2. When title editing is completed, you will see the next figure.

```

Edit Title
OK!

```

2.10 Edit Track (for CD only) (ARS-2039A do not have this function)

Function 10 Edit Track is exclusively designed for editing a collection of favorite songs from CDs. In other words, it can collect different tracks (songs) on a number of CDs and merge them into a single CD. This function includes 4 subfunctions: CD to CD, CD to HDD, Play Audio Track and Close Session. Refer to page 24 for the menu.

Select function 10.

```

10. Edit Track

```

2.10.1 CD to CD Edit

Now press **ENT**, and you will enter the following figure. Here the function CD to CD Edit lets you select a track or more from CD-ROM, and then copy into blank CD-R/RWs.

```

10-01. Edit Track
CD to CD Edit

```

Now press **ENT**, and you will enter the following figure. Here 1/10 means the number one of the 10 tracks, and 03:25 means the length of track.

```

Select Track:
1/10      03:25

```

You can press ▼ to see the second track and so on. Suppose we decide to select the first track, then press **ENT**. A “+” will appear beside 1/10 as shown below. But pressing **ENT** again may cancel the selection.

```

Select Track:
+1/10     03:25

```

After selecting, please use ▲ to move to the “End” menu as shown below.

```

Select Track:
End 1Trk03:25

```

Press **ENT** to finish the CD editing, and use ▲ ▼ to confirm Yes or No.

End edit disc
and burn?Yes

LCD will show the copying information as follows.

Copying-24X Edit
1/10 -> 1/1

“1/1” means the first track of all tracks we have selected, and here we have just selected one track. When copying comes to an end, LCD will show the message as follows.

Burn Complete!
OK: 07

The system will ask if you want to keep editing. Please use ▲ ▼ to confirm Yes or No as shown below.

Continue edit
next Disc?Yes

If you want to keep editing, the current source CD will eject automatically, and the system will ask you to insert another new CD as shown below.

Insert next disc

After inserting the new CD, press **ENT** to edit as before. Suppose we decide to select the second track, then press **ENT**. A “+” will appear beside 2/10 as shown below.

Select Track:
+2/10 04:25

After selecting, please use ▲ to move to the “End” menu as shown below.

Select Track:
End 1Trk04:25

Press **ENT** to finish the CD editing, and use ▲ ▼ to confirm Yes or No.

```
End edit disc
and burn?Yes
```

LCD will show the copying information as follows.

```
Copying-24X Edit
2/10 -> 2/2
```

“2/2” means the second track of all tracks we have selected, and so far we have selected two tracks from two different CDs. When copying comes to an end, LCD will show the message as follows.

```
Burn Complete!
OK: 07
```

The system will ask if you want to keep editing. Suppose we don't like to continue, then press ▼ to confirm No.

```
Continue edit
next Disc?No
```

Now press **ENT**. The system will ask if you want to close all CDs' sessions. Please use ▲ ▼ to confirm Yes or No as shown below.

```
Closing Session
Please wait ---
```

When closing comes to an end, LCD will show the message as follows.

```
Closing Session
OK:10
```

2.10.2 CD to HDD Edit

After closing sessions, press **ESC** and ▼ to enter the following figure. Here the function CD to HDD Edit lets you select a track or more from CD-ROM, and then copy into a certain partition of HDD.

```
10-02. Edit Track
CD to HDD Edit
```

Now press **ENT**, and you will enter the following figure. Here 1/10 means the number one of the 10 tracks, and 03:25 means the playing time.

```
Select Track:
1/10    03:25
```

Suppose we decide to select the first track, then press **ENT**. A “+” will appear beside 1/10 as shown below. But pressing **ENT** again may cancel the selection.

```
Select Track:
+1/10    03:25
```

After selecting, please use ▲ to move to the “End” menu as shown below.

```
Select Track:
End 1Trk03:25
```

Press **ENT** to finish the CD editing, and use ▲ ▼ to confirm Yes or No.

```
End edit disc
and burn?Yes
```

Then, the track as an image file will be loaded into HDD. LCD will show the loading information as follows.

```
Load-P0-24X Edit
1/10 -> 1/1
```

When loading comes to an end, LCD will show the message as follows.

```
Image load OK
```

The system will ask if you want to keep editing. Please use ▲ ▼ to confirm Yes or No as shown below.

```
Continue edit
next Disc? Yes
```

If you want to keep editing, the current source CD will eject automatically, and the system will ask you to insert another new CD as shown below.

```
Insert next disc
```

After inserting the new CD, press **ENT** to edit as before. Suppose we select the second track, then press **ENT**. A “+” will appear beside 2/10 as shown below.

```
Select Track:
+2/10    04:25
```

After selecting, please use **▲** to move to the “End” menu as shown below.

```
Select Track:
End 1Trk04:25
```

Press **ENT** to finish the CD editing, and use **s t** to confirm Yes or No.

```
End edit disc
and burn?Yes
```

Then, the track as an image file will be loaded into HDD. LCD will show the loading information as follows.

```
Load-P0-24X Edit
2/10 -> 2/2
```

When loading comes to an end, LCD will show the message as follows.

```
Image load OK
```

The system will ask if you want to keep editing. This time please use **▼** to confirm No as shown below.

```
Continue edit
next Disc? No
```

Then, the system will ask if you want to burn from HDD into CD-R/RW or move into a partition. Please use **▲** to confirm Burn as shown below.

```
Burn or Move to
partition? Burn
```

After pressing **▲** , LCD will show the copying information as follows.

```
Copy-P0-24X 0%
1/2 Trk03:25
```

When burning finishes, LCD will show the results as follows.

Burn Complete !
OK: 07

Now press **ESC** to enter the following figure. And press ▼ to move the data from HDD template into a certain partition.

Burn or Move to
partition? Move

After pressing ▼, you need to select a partition into which the data will be moved. Suppose we select A as shown below.

Select Partition
A

After pressing **ENT**, LCD will show the moving information as follows.

Moving to P:A
0%

When moving finishes, LCD will show the results as follows.

Moving to P:A
OK!

If the chosen partition has contained image data, the system will ask to overwrite or keep the data. Press ▲ to overwrite.

Image Exists
Overwrite?Yes

After pressing ▲, LCD will show the moving information as follows.

Moving to P:A
0%

When moving finishes, LCD will show the results as follows.

Moving to P:A
OK!

2.10.3 Play Audio Track

This function is to make the copy controller act as a music player. You can connect a headphone to the headphone jack on the source, and enjoy the music.

Now press **ESC** and ▼ to select the function.

```
10-03. Edit Track
Play Audio Track
```

Use ▲ ▼ to select the track you want to play.

```
Select Track:
1/10  03:25
```

After selecting and pressing **ENT**, LCD will show the playing information below.

```
Playing Track-1
00:00 / 03:25
```

2.10.4 Close Session

This function is to close CDs and let no data written into. After closing, you can put the CDs on any normal player and listen.

Now press **ESC** and ▼ to select the function.

```
10-04. Edit Track
Close Session
```

After pressing **ENT**, the system will ask if you are sure to close.

```
Close all disc's
session? Yes
```

After pressing **ENT**, LCD will show the message as follows.

```
Closing Session
Please wait ---
```

When closing finishes, LCD will show the results as follows.

```
Closing Complete
OK:7      Fail:0
```

2.11 Setup

Function 11 Setup lets you change the default settings. Once you change a setting, remember to press **ENT** to save it. However, it is suggested to use the defaults for the optimal operation. This function includes 21 subfunctions: Language, CD Burn Speed, DVD Burn Speed, Read Speed, Auto Start Drive, Startup Menu, Auto Verify, Auto Compare, Auto Prescan, Eject Disc, Burn On The Fly, Burn Mode, Display Time, Button Sound, Device Info, System Info, Quick Erase, Full Erase, Auto Close Tray, Quick Compare, and Audio Burn Speed. Refer to page 14 for the menu.

Select function 11.

11. Setup

2.11.1 Language

Now press **ENT**, and you will enter the following figure. The function Language lets you select a language in which messages can be shown on LCD.

11-01. Setup
Language

Press **ENT** to enter the following figure. The default is English. Spanish, Japanese, Traditional Chinese and Simplified Chinese are made to order.

Language
English

2.11.2 CD Burn Speed

Now press **ESC** and ▼ to enter the following figure. This function lets you control the burning speed of CD writers.

11-02. Setup
CD Burn Speed

Press **ENT** to enter the following figure. The default is auto.

CD Burn Speed
Auto

2.11.3 DVD Burn Speed

Now press **ESC** and ▼ to enter the following figure. The function DVD Burn Speed lets you control the burning speed of DVD writers.

11-03. Setup
DVD Burn Speed

Press **ENT** to enter the following figure. The default is maximum.

DVD Burn Speed
Maximum

2.11.4 Read Speed

Now press **ESC** and ▼ to enter the following figure. The function Read Speed lets you control the reading speed of target CDs.

11-04. Setup
Read Speed

Press **ENT** to enter the following figure. The default is maximum, but there are still other choices: 32X, 16X and 8X.

Read Speed
Maximum

2.11.5 Auto Start Drive

Now press **ESC** and ▼ to enter the following figure. Auto Start Drive is to copy or test automatically once you put blank DVDs into the writers.

11-05. Setup
Auto Start Drive

Press **ENT** to enter the following figure. The default is Off. Press t to select 1 (one blank DVD).

Auto Start Drive
Off

2.11.6 Startup Menu

Now press **ESC** and ▼ to enter the following figure. Startup Menu lets you select any one of the functions except Adv Setup as the first item appearing on the menu whenever you turn on the copy controller.

11-06. Setup
Startup Menu

Press **ENT** to enter the following figure. The default is Copy. You can certainly select any other function as the first item, but remember to press **ENT** to confirm.

Startup Menu
1. Copy

2.11.7 Auto Verify

Now press **ESC** and ▼ to enter the following figure. Auto Verify is to verify automatically if the target DVDs can be read after copying.

11-07. Setup
Auto Verify

Press **ENT** to enter the following figure. The default is Off. Press ▼ to select On.

Auto Verify
Off

2.11.8 Auto Compare

Now press **ESC** and ▼ to enter the following figure. Auto Compare is to compare automatically the source DVD and the target DVDs after copying.

11-08. Setup
Auto Compare

Press **ENT** to enter the following figure. The default is Off. Press ▼ to select On.

Auto Compare
Off

2.11.9 Auto Prescan (ARS-2039A do not have this function)

Now press **ESC** and ▼ to enter the following figure. Auto Prescan is to scan automatically if the source DVD can be read correctly, and by the way to test the reading speed.

11-09. Setup
Auto Prescan

Press **ENT** to enter the following figure. The default is Off. Press ▼ to select On.

Auto Prescan
Off

2.11.10 Eject Disc (ARS-2039A do not have this function)

Now press **ESC** and ▼ to enter the following figure. Eject Disc provides three choices. They are Eject Good Only, Eject All Disc, and Do Not Eject. Eject Good Only means that the DVDs will eject automatically only when they are copied successfully. Eject All Disc means that the DVDs will eject automatically whether they are copied successfully or not. Do Not Eject means that you need to eject the DVDs manually when copying finishes.

11-10. Setup
Eject Disc

Press **ENT** to enter the following figure. The default is Eject Good Only. Press ▼ to select Eject All Disc or Do Not Eject.

Eject Disc
Eject Good Only

2.11.11 Burn On The Fly

Now press **ESC** and ▼ to enter the following figure. Burn On The Fly lets you control the copying methods. When the setting is On, the data will be copied directly from the source DVD to the target DVDs. When the setting is Off, the data will be loaded into a partition of HDD first, and hence copying will be done.

11-11. Setup
Burn On The Fly

Press **ENT** to enter the following figure. The default is On. Press ▼ to select Off.

Burn On The Fly
On

2.11.12 Burn Mode

Now press **ESC** to return to Function 11, and then select part 12 Burn Mode as the following figure shows. Burn Mode lets you control the burning modes. There are two modes: DAO (Disc At Once) and TAO (Track At Once). They only supports CD. If the DVD writer doesn't support the mode you have selected, the copy controller will automatically switch to another mode.

11-12. Setup
Burn Mode

Press **ENT** to enter the next figure. The default is DAO. Press ▼ to select TAO.

Burn Mode
DAO

2.11.13 Display Time

Now press **ESC** and ▼ to enter the following figure. Display Time is to show the copying time.

11-13. Setup
Display Time

Press **ENT** to enter the next figure. The default is On. Press ▼ to select Off.

Display Time
On

2.11.14 Button Sound

Now press **ESC** and ▼ to enter the following figure. Button Sound lets you control the sound of a button when you press it.

11-14. Setup
Button Sound

Press ENT to enter the next figure. The default is On. Press ▼ to select Off

Button Sound
On

2.11.15 Device Info

Now press **ESC** and ▼ to enter the following figure. Device Info shows the information of the DVD-ROM and any of the DVD writers you have installed.

11-15. Setup
Device Info

Press **ENT** to enter the next figure.

00 CH01
S-MULTI:PIONEER

Press **ENT** to enter the next figure.

DVD-RW DVR-112
1.22

2.11.16 System Info

Now press **ESC** and ▼ to enter the following figure. System Info shows the information of the system.

11-16. Setup
System Info

Press ENT to enter the next figure.

2040P ver:1.05B
2007/12/20 ACARD

Press ENT to enter the next figure.

core_ver:0.59
2007/06/13

Press **ENT** to enter the next figure.

```
CopyAp ver:0.40
2007/12/20
```

Press **ENT** to enter the next figure.

```
DVD Duplicator
DDR Memory. 128M
```

Press **ENT** to enter the next figure.

```
UI ver:0.40
2007/12/20
```

2.11.17 Quick Erase

Now press **ESC** and ▼ to enter the following figure. Quick Erase is to erase the data on the DVD rewriteable discs quickly.

```
11-17. Setup
Quick Erase
```

Press **ENT** to enter the next figure. Use ▲ ▼ to confirm Yes or No.

```
All data will be
lost, erase?Yes
```

After confirming Yes and pressing **ENT**, LCD will show the message as follows.

```
Erasing disc
00:25 (Quick)
```

When erasing finishes, LCD will show the results as follows.

```
Quick Erase
OK: 10
```

2.11.18 Full Erase

Now press **ESC** and ▼ to enter the following figure. Full Erase is to erase the data on the DVD rewriteable discs completely. Compared with Quick Erase, Full Erase takes longer time to do the job.

```
11-18. Setup
Full Erase
```

Press **ENT** to enter the next figure. Use ▲ ▼ to confirm Yes or No.

All data will be
lost, erase?Yes

After confirming Yes and pressing **ENT**, LCD will show the message as follows.

Erasing disc
45:00 (Full)

When erasing finishes, LCD will show the results as follows.

Full Erase
OK:10

2.11.19 Auto Close Tray

Now press **ESC** and ▼ to enter the following figure. Auto Close Tray is to close the writer's tray automatically. It is related to function 11.5 Auto Start Drive. If you haven't set any writer to copy in function 11.5, this function will be invalid.

11-19. Setup
Auto Close Tray

Press **ENT** to see the following figure.

Auto Close Tray
5

Here 5 means that it takes 5 seconds to close the writer's tray automatically after copying finishes and the tray is ejected. Besides 5 seconds, there are 10, 15, 20, 25, 30, 35, 40, 45, and 50 seconds for choice. If you have set one or all seven writers in function 11.5, and choose 10 seconds here, then one writer's tray or all seven writers' trays will be closed in 10 seconds after copying finishes.

2.11.20 Quick Compare

Now press **ESC** and ▼ to enter the following figure. Quick Compare is related to function 5 Compare. It lets you set a certain byte. When the error of a target DVD is beyond the set byte, the comparison between the source DVD and the target DVD will stop. Yet the comparison of the other 6 target DVDs will continue.

11-20. Setup
Quick Compare

Press **ENT** to see the following figure. The default is Off, but you can press ▼ to choose a certain byte like 1 Byte, 1 KB, 10 KB, 100KB, 1 MB, etc.

Quick Compare
Off

2.11.21 Audio Burn Speed

Now press **ESC** and ▼ to enter the following figure. Audio Burn Speed lets you control the burning speed of audio CDs.

11-21. Setup
Audio Burn Speed

Press **ENT** to see the following figure. The default is auto, but there are maximum, 40X, 32X, 24X, 20X, etc. for choice.

Audio Burn Speed
Auto

Chapter 3 Troubleshooting

3.1 About LCD

After you power up, if there is no display on the LCD, check if the connection of power cord is firm and the environment of power outlet is normal.

3.2 About Error Messages

During Copy, Test, Compare and Verify, etc. if you press ESC to abort, an error message will appear on LCD. Abortion may cause the copy controller to hang up, therefore you have to power on again.

If reading fails, an error message will appear on LCD. Get a new source DVD to try again.

If the copy controller hasn't detected any device after powering on, an error message will appear on LCD.

3.3 About DVD-ROM/DVD Writers

If a DVD-ROM or a DVD writer cannot read, confirm the format of the source DVD and check if it is damaged.

Use any DVD writer to read the source DVD. If it works, the DVD-ROM is probably defective or not compatible with the source DVD.

3.4 About Buttons

If you press any one of the four buttons on the panel, but there is no response, it is perhaps that the button cannot function well. Inspect the jumper setting.

3.5 About DVD Writer Not Readable

After copying if the DVD writer is not readable, use Compare to examine, or get another DVD-ROM to test.

3.6 About High Failure Rate

If the failure rate of copying is high, do the following things to improve.

- Lower the speed of DVD writer.
- Inspect if the blank disc's quality is good.
- Update the firmware.
- Inspect the DVD writer's maximum writing speed. If the speed is over 8X, copy the data to a hard disk first, and then transmit to DVD.

3.7 About Firmware Update

If you cannot update the firmware, please inspect the firmware. Perhaps you have downloaded a wrong file.

Failure in firmware update may cause the copy controller to fail in booting. Under the circumstances, return the control board to distributor for repair.

Appendix A LCD Messages

1. Normal Conditions:

All data will be lost, erase?.....	All data on the disc will be lost. Confirm the erasing of data.
Analyzing.....	Analyze the source disc.
Audio Disc!!! Can't compare!.....	The system cannot compare the audio discs.
Cannot read TOC.....	The system cannot read the contents of disc.
Check Target Please Wait	The system is checking the target device.
Detect Drives.....	Detect what drives are connected with the system.
DVD-RW does not Support the Func.....	DVD-RW doesn't support this function.
Erase Finished.....	The erasing of data comes to an end.
Erasing disc.....	The system is erasing the data on the disc.
Fail to get Drive Info!.....	The drive information cannot be obtained.
Fail to get Src Disc Info!.....	The information of source disc cannot be obtained.
Hold ESC to exit.....	Press ESC for a second to terminate the test.
Identical.....	The comparison results are the same.
Initialize SDRAM.....	Initialize the memory of the system.
Load Default Config?.....	Do you want to load the default settings?
No Erasable Disc in DVD-RW!!.....	The disc on the DVD-RW device is not rewritable.
Preparing.....	The system is preparing to record.
Press a Key to Eject Fail Disc.....	Press any key to eject the failed disc after copying.
Press a Key to Eject Good Disc.....	Press any key to eject the good disc after copying.
Read disc error	During comparison the disc cannot be read.
Save new config Fail!.....	The new setting of configuration cannot be saved.
Source Disc Empty!!!.....	The source disc doesn't contain any data.
Source Disc Not Ready.....	Source disc is not ready to be read.
Source Drive Not Ready.....	Source drive is not ready to read.
Src&Tgt can't in the same channel.....
.....	During comparison the source and target discs cannot be in the same channel.
Target Disc Not Empty!!!.....	The target disc still has data.
Target Disc Not Ready.....	Target disc is not ready to be written into.
Target Drive Not Ready.....	Target drive is not ready to write.
Target overflow.....	The target disc hasn't enough capacity to store new data.
TOC not match.....	The comparison results are not the same.
User Abort!.....	Cancel the job during operation.

2. Connecting with a HDD:

All data will be lost, format?.....
.....	All data on the hard disk will be lost. Confirm the formatting of hard disk.
Delete Image in Partition xx?.....	Confirm the deleting of data image in partition xx.
Format HDD?.....	Ask if you want to format the hard disk.
Format HDD OK!	The Formatting of hard disk has been completed.
HDD not Format!.....	The hard disk hasn't been formatted yet.
HDD too small	The capacity of hard disk is too small.
HDD too small to handle image!.....
.....	The hard disk hasn't enough capacity to store the data image (at least 5Gbytes).
Image Exists Overwrite?.....
.....	There is a data image in the current partition. Confirm the overwriting of data.
Image load Fail.....	The image isn't successfully loaded from DVD to the hard disk.
Image load OK.....	The image is successfully loaded from DVD to the hard disk

No Image in Partition xx.....There is no data image in partition xx.
No Valid HDD!..... The system cannot find a hard disk.
Partition Damage.....The partition is damaged.
Select HD First!..... Select a formatted hard disk at first.
Verify Disk or Partition?..... Do you want to verify the hard disk or just a partition?
Verify Hard Disk Fail!..... The hard disk is not verified successfully.

3. Audio Editing:

Burn or Move to partition?.....
.....Do you want to directly copy the data into disc or move them to the partition.
Can't edit HDD..... The hard disk cannot be edited as a source audio disc.
Close all disc's session?..... Confirm the closing of disc sessions.
Continue edit next Disc?..... Ask if you want to continue the music disc editing.
End edit disc and burn?..... Finish the music disc editing and start to copy.
Erase selected Tracks?..... Abort the selected tracks and delete them.
Ins empty disc Continue?..... Do you want to insert a blank disc and continue copying?
Insert next disc..... Insert the next audio disc.
NO AUDIO track in this disc..... The source disc has no audio track.
Sessions were closed already! The disc sessions have already been closed.
Target Overflow Re-Select.....
.....The disc capacity is not enough to store the selected tracks. Please select again.
Tgt overflow, del last trk?..... The disc capacity is not enough to store the selected tracks. So, do you want to delete the last track?

4. Firmware Update:

Check Sum Error!..... The updated firmware has errors.
Flash ROM fail!..... Data cannot be written into Flash ROM.
Invalid firmware The disc doesn't contain a valid firmware.
Last update F/W Fail!..... The firmware is not updated successfully.
Last update F/W OK!..... The firmware is updated successfully.
Searching F/W The system is searching for a valid firmware.
Source can't be Hard Disk!.....During comparison the source cannot be hard disk.

Technical Support Form

Email address: support@acard.com

Website: <http://www.acard.com>

Model Name* (ex: ARS-2035A)		Firmware version*	
System Configuration			
Motherboard/System model*			
SCSI host adapter/chip brand & model*			
SCSI host BIOS version			
Other I/O card*			
Operating System*			
SATA HDD brand & model*			
SATA HDD capacity			
SATA HDD firmware			
Problem description*			

『 * 』 is required